

Original operating instructions

TOX® FinePress

KFS / KFL / KFW / KFSU / KFLU / KFWU

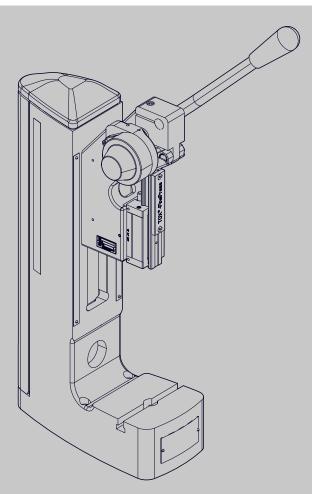




Table of contents

1 1	mnc	ortant	ınt	~rm	2tion

1.1	Legal note	0
1.2	Exclusion of liability	6
1.3	Conformity	6
1.4	Validity of the document	7
1.4.1	Content and target group	7
1.4.2	Other applicable documents	7
1.5	Gender note	7
1.6	Displays in the document	8
1.6.1	Display of warnings	8
1.6.2	Display of general notes	8
1.6.3	Highlighting of texts and images	9
1.7	Contact and source of supply	10
2	Safety	
2.1	Basic safety requirements	11
2.1 2.2	Basic safety requirements Organizational measures	
2.2		12
2.2 2.2.1	Organizational measures	12 12
2.2 2.2.1	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel	12 12 13
2.2 2.2.1 2.2.2 2.3	Organizational measures	12 12 13
2.2 2.2.1 2.2.2 2.3 2.3.1	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential	12 12 13 14
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards	12 12 13 14 14
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2 2.3.3	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards	12 13 14 14 15
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2 2.3.3 2.3.4	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards Pneumatic hazards	12 13 14 14 15 15
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2 2.3.3 2.3.4 2.3.5	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards Pneumatic hazards Contusions	12 13 14 14 15 15
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2 2.3.3 2.3.4 2.3.5 2.3.6	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards Pneumatic hazards Contusions Hydraulic hazards	12 13 14 14 15 15 15
2.2 2.2.1 2.2.2 2.3 2.3.1 2.3.2 2.3.3 2.3.4 2.3.5 2.3.6 2.3.7	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards Pneumatic hazards Contusions Hydraulic hazards Electromagnetic hazards	12 13 14 14 15 15 15
2.2 2.2.1 2.2.2	Organizational measures Safety requirements for the operating company Selection and qualifications of personnel Fundamental hazard potential Electrical hazards Thermal hazards Pneumatic hazards Contusions Hydraulic hazards Electromagnetic hazards Laser	12 13 14 14 15 15 16 16



3	About this product	
3.1	Intended use	. 19
3.1.1	Safe and correct operation	. 19
3.1.2	Foreseeable misuse	. 20
3.1.3	Substances harmful to the wetting properties of lacquers (LABS)	. 20
3.2	Product identification	. 20
3.2.1	Type plate	. 20
3.3	Product overview and function description	. 21
4	Technical data	
4.1	Data sheet and type plate	. 22
4.2	Press force diagrams	. 22
5	Transport and storage	
5.1	Safety during transport	. 23
5.2	Storage when not in use	. 24
5.3	Transport by lifting device	. 25
5.4	Dispatch for repair	. 26
6	Installation	
6.1	Safety during installation	. 27
6.2	Requirements for installation	. 29
6.2.1	Set-up location	. 29
6.3	Installing accessories	. 30
3.3.1	Installing process monitoring (option)	. 30
5.3.2	Installing the ergonomic handle (optional)	
5.3.3	Installing the stroke counter (optional)	
5.3.4	Installing the force sensor (optional)	
3.3.5	Install the return stroke lock (option)	
5.3.6	Installing the slide table (optional)	
6.3.7 6.3.8	Installing travel sensor (option)	
٥.٥.٥	Installing the tool holding fixture (optional)	. 40



1	Commissioning	
7.1	Safety during the commissioning	41
7.1.1	Safety device	41
7.2	Requirements for the commissioning	42
8	Operation	
8.1	Safety in operation	43
8.2	Requirements for operation	43
8.3	Process monitoring	43
8.4	Setting the open height of the press head	44
8.5	Adjusting the working stroke	46
8.5.1	Shifting the toggle lever on presses with a bracket.	47
8.5.2	Shifting the toggle lever on presses with set screws.	48
8.6	Fine adjustment of working stroke (option)	49
8.7	Resetting the stroke counter (optional)	49
8.8	Adjusting the return stroke lock (optional)	50
8.9	Setting the travel sensor (option)	53
9	Troubleshooting	
9.1	Safety during troubleshooting	54
9.2	Detecting faults	55
	Maintenance table	
10	Maintenance	
10.1	General information	57
10.2	Safety during maintenance	58
10.3	Requirements for maintenance	58
10.3.1	Set system to maintenance position	58
10.4	TOX® FinePress maintaining	59
10.4.1	TOX® FinePress inspecting	59
0.4.2	Inspecting the fastening of the press head	
0.4.3	Inspecting and cleaning movable parts and guides	61



11	Repairs	
11.1	Safety during repairs	62
12	Disassembly and Disposal	
12.1	Safety during disassembly and disposal	63
12.2	Decommissioning	64
12.3	Shutdown	64
12.4	Disassembling	65
12.5	Disposal	65
13	Appendices	
13.1	Declaration of conformity	66
13.2	Press force diagrams	68

Index



1 Important information

1.1 Legal note

All rights reserved.

Operating instructions, manuals, technical descriptions and software published by TOX® PRESSOTECHNIK SE & Co. KG ("TOX® PRESSOTECHNIK") are copyright and must not be reproduced, distributed and/or otherwise processed or edited (e.g. by copying, microfilming, translation, transmission in any electronic medium or machine-readable form). Any use - including of extracts - contrary to this condition is prohibited without approval in writing by TOX® PRESSOTECHNIK and may be subject to criminal and civil legal sanctions.

If this manual refers to goods and/or services of third parties, this is for example only or is a recommendation by TOX® PRESSOTECHNIK.

TOX® PRESSOTECHNIK does not accept any liability or warranty/guarantee with reference to the selection, specifications and/or usability of these goods and services. The use and/or representation of trademarked brands that do not belong to TOX® PRESSOTECHNIK are for information only; all rights remain the property of the owner of the trademarked brand.

Operating instructions, manuals, technical descriptions and software are originally compiled in German.

1.2 Exclusion of liability

TOX® PRESSOTECHNIK has checked the contents of this publication to ensure that it conforms to the technical properties and specifications of the products or plant and the description of the software. However, discrepancies may still be present, so we cannot guarantee complete accuracy. The supplier documentation included with the system documentation is an exception.

However, the information in this publication is checked regularly and any required corrections are included in subsequent editions. We are grateful for any corrections and suggestions for improvement. TOX® PRESSOTECHNIK reserves the right to revise the technical specifications of the products or plant and/or the software or documentation without prior notice.

1.3 Conformity

The product is compliant with EU guidelines. See separate Declaration of conformity or installation declaration.



1.4 Validity of the document

1.4.1 Content and target group

This manual contains information and instructions for the safe operation and safe maintenance or servicing of the product.

- All information in this manual is up to date at the time of print.
 TOX® PRESSOTECHNIK reserves the right to make technical changes that improve the system or increase the standard of safety.
- The information is intended for the operating company as well as operating and service personnel.

1.4.2 Other applicable documents

In addition to the available manual, further documents can be supplied. These documents must also be complied with. Other applicable documents can be, for example:

- additional operating manuals (e.g. of components or of a whole system)
- Supplier documentation
- Instructions, such as software manual, etc.
- Technical data sheets
- Safety data sheets
- Data sheets
- Schematics

1.5 Gender note

In order to enhance readability, references to persons that also relate to all sexes are normally only stated in the usual form in German or in the corresponding translated language in this manual, thus e.g. "operator" (singular) for male or female, or "operators" (plural) for male or female". This should in no way convey any gender discrimination or any violation of the principle of equality, however.



1.6 Displays in the document

1.6.1 Display of warnings

Warning signs indicate potential dangers and describe protective measures. Warning signs precede the instructions for which they are applicable.

Warning signs concerning personal injuries

A DANGER

Identifies an immediate danger!

Death or severe injuries will occur if appropriate safety measures are not taken.

Measures for remedial action and protection.

MARNING

Identifies a potentially dangerous situation!

Death or serious injury may occur if appropriate safety measures are not taken.

Measures for remedial action and protection.

A CAUTION

Identifies a potentially dangerous situation!

Injury may occur if appropriate safety measures are not taken.

Measures for remedial action and protection.

Warning signs indicating potential damage

NOTE

Identifies a potentially dangerous situation!

Property damage may occur if appropriate safety measures are not taken.

Measures for remedial action and protection.

1.6.2 Display of general notes

General notes show information on the product or the described action steps.



(i)

Identifies important information and tips for users.

1.6.3 Highlighting of texts and images

The highlighting of texts facilitates orientation in the document.

- ✓ Identifies prerequisites that must be followed.
- 1. Action step 1
- 2. Action step 2: identifies an action step in an operating sequence that must be followed to ensure trouble-free operation.
- Identifies the result of a complete action.
- Identifies a single action step or several action steps that are not in an operating sequence.

The highlighting of operating elements and software objects in texts facilitates distinction and orientation.

- <In square brackets> identifies operating elements, such as buttons, levers and (valves) stopcocks.
- "with quotation marks" identifies software display panels, such as windows, messages, display panels and values.
- **In bold** identifies software buttons, such as buttons, sliders, checkboxes and menus.
- In bold identifies input fields for entering text and/or numerical values.



1.7 Contact and source of supply

Only use original spare parts or spare parts approved by TOX® PRESSOTECHNIK.

TOX® PRESSOTECHNIK SE & Co. KG Riedstraße 4 88250 Weingarten / Germany Tel. +49 (0) 751/5007-767

E-Mail: info@tox-de.com

For additional information and forms see www.tox.com



2 Safety

2.1 Basic safety requirements

The product is state of the art. However, operation of the product may involve danger to life and limb for the user or third parties or damage to the plant and other property.

For this reason the following basic safety requirements will apply:

- Read the operating manual and observe all safety requirements and warnings.
- Operate the product only as specified and only if it is in perfect technical condition.
- Remedy any faults in the product or the plant immediately.



2.2 Organizational measures

2.2.1 Safety requirements for the operating company

The operating company is responsible for compliance with the following safety requirements:

- The operating manual must always be kept available at the operation site of the product. Ensure that the information is always complete and in legible form.
- In addition to the operating manual, the generally valid legal and other binding rules and regulations must be provided for the following content and all personnel must be trained accordingly:
 - Work safety
 - Accident prevention
 - Working with hazardous substances
 - First aid
 - Environmental protection
 - Traffic safety
 - Hygiene
- The requirements and contents of the operating manual must be supplemented by existing national regulations (e.g. for prevention of accidents and for environmental protection).
- Instructions for special operating features (e.g. work organization, work processes, appointed personnel) and supervisory and reporting obligations must be added to the operating manual.
- Take action to ensure safe operation and make sure that the product is maintained in a functional condition.
- Only allow authorized persons access to the product.
- Ensure that all personnel work with awareness of safety and potential dangers with reference to the information in the operating manual.
- Provide personal protective equipment.
- Maintain all safety and information on dangers regarding the product complete and in legible condition and replace as required.
- Do not make any changes, carry out attachments or conversions to the product without the written approval of TOX® PRESSOTECHNIK. Action contrary to the above will not be covered by the warranty or the operating approval.
- Make sure that the annual safety inspections are carried out and documented by an expert.



2.2.2 Selection and qualifications of personnel

The following safety requirements are applicable for the selection and qualifications of personnel:

- Only appoint persons to work on the plant who have read and understood the operating manual, and in particular, the safety instructions before starting work. This is particularly important for persons who only work on the plant occasionally, e.g. for maintenance work.
- Only allow persons appointed and authorized for this work access to the plant.
- Only appoint reliable and trained or instructed personnel.
- Only appoint persons to work in the danger zone of the plant who can perceive and understand visual and acoustic indications of danger (e.g. visual and acoustic signals).
- Ensure that assembly and installation work and the initial commissioning are performed exclusively by qualified personnel who have been trained and authorized by TOX® PRESSOTECHNIK.
- Maintenance and repairs must be performed by qualified and trained personnel only.
- Ensure that personnel who are being trained, instructed or are in an apprenticeship can only work on the plant under the supervision of an experienced person.
- Have work on electrical equipment performed only by electricians or trained persons under the direction and supervision of an electrician in accordance with the electrotechnical regulations.



2.3 Fundamental hazard potential

Fundamental hazard potentials exist. The specified examples draw attention to known hazardous situations, but are not complete and do not in any way provide safety and risk awareness action in all situations.

2.3.1 Electrical hazards

Attention should be paid to electrical hazards particularly inside the components in the area of all assemblies of the control system and motors of the installation. The following basically applies:

- Have work on electrical equipment performed only by electricians or trained persons under the direction and supervision of an electrician in accordance with the electrotechnical regulations.
- Always keep the control box and/or terminal box closed.
- Before commencing work on electrical equipment, switch off the main switch of the system and secure it against being switched back on inadvertently.
- Pay attention to the dissipation of residual energy from the control system of the servomotors.
- Make sure that the components are disconnected from the power supply when carrying out the work.

2.3.2 Thermal hazards

During operation piece parts may become hot and cause burns when touched. Hazardous positions are generally marked with a symbol. See Safety symbols, Page 18

- Wear individual protective equipment.
- Before starting work, make sure that surfaces have cooled down sufficiently.



2.3.3 Pneumatic hazards

Attention must be paid to pneumatic hazards particularly on the pneumatic supply lines and connection points.

The following basically applies:

- Allow work to be carried out on pneumatic equipment by authorized service personnel only.
- Wear individual protective equipment.
- Do not exceed the permissible pressure.
- First switch on compressed air when all hose connections have been established and secured.
- Do not uncouple any hoses under pressure.
- If hoses slip off, switch off the compressed air supply immediately.

2.3.4 Contusions

Contusions and hand injuries can occur in the radius of action of the product. The following applies generally:

- Make sure that that no persons are located in the danger area during operation.
- During necessary work in the danger area (e.g. maintenance, cleaning), secure the system against unexpected, accidental and unauthorized activation.
- Make sure that parts or tools cannot fall down or descend as a result of stored energy. Use appropriate fuses.

2.3.5 Hydraulic hazards

Attention must be paid to hydraulic hazards particularly on the supply lines, connection points and vent points.

The following applies generally:

- Allow work to be carried out on hydraulic equipment by authorized service personnel only.
- Wear individual protective equipment.
- Do not exceed the permissible pressure.
- Do not remove any hoses under pressure.
- Never vent hydraulic components under pressure.



2.3.6 Electromagnetic hazards

Electromagnetic hazards are to be taken into account in the area of electromagnetically vibrating or oscillating components.

Regular work on and with electromagnetically vibrating or oscillating components can cause disorders in the blood flow of the fingers as well as neurological and motoric dysfunctions.

The following applies generally:

- Wear protective anti-vibration gloves when performing necessary work!
- Electromagnetic fields can have an indirect effect on heart pacemakers and other implants. Adhere to safety distances.

2.3.7 Laser

Depending on the model and features, lasers can be installed for the purpose of recognition. There is a danger of looking into the laser in some situations. If this is not avoided, eye injuries may result.

The following applies generally:

- Do not look into the direct or the reflected beam.
- If the laser beam hits the eye, deliberately close the eyes and move the head immediately out of the beam.
- When using the laser, no optical instruments are to be used for viewing the source of the beam, since this can lead to exceeding the exposure limit values.
- Manipulation (modification) of the laser equipment is inadmissible.

2.3.8 Hazardous substances

The following safety requirements apply when handling chemical substances:

- Observe the applicable safety regulations on handling chemical substances and the information on the manufacturer's safety data sheets of hazardous substances.
- Wear individual protective equipment.
- In the event of eye or skin contact, rinse the affected area, change contaminated clothing and visit a doctor if necessary. Provide appropriate equipment (eye wash bottle, washbasin) near the workplace.
- Groundwater hazardous substances must not get into the ground or sewage system. Collect groundwater hazardous substances and dispose of them properly.



2.3.9 Noise

Depending on the equipment, an increase in the noise level can arise in the sphere of the product.

- Keep the duration of the exposure at a minimum.
- Wear individual protective equipment.



2.4 Safety symbols

Safety symbols are important components of the safety concept and help to prevent accidents. The safety symbols provide information about potential hazards that could cause serious injuries.

The following safety symbols can be attached on the product:

Symbol	Hazard	Notes
	Warning of suspended load	Do not stay in the danger zone of the suspended load.
		Identifies fork-lift truck brackets.
		Identifies attachment point.
<u>\$555</u>	Warning of hot surfaces	In the area of motors, drives and fans.
4	Warning of electrical voltage	In the area of the entire control box.
	Warning of crushing	Risk of crushing in the working area.

Tab. 1 Safety symbols



3 About this product

3.1 Intended use

The machine in conjunction with the designated tool is used for

- Installing, press fitting
- Punching, pressing (of function elements)
- Riveting, crimping, flaring
- · Punching, piercing
- Embossing, marking
- Tensioning, clamping, crimping
- Pressing, compressing
- · Clinching, joining

of sheet metal or mechanical modules.

3.1.1 Safe and correct operation

Intended use includes the following conduct:

- Only operate with the components for which it is specified.
- Follow all instructions in this operating manual.
- Comply with the specified maintenance intervals and perform maintenance work correctly.
- Operate in compliance with the conditions of the technical data.
- Operation with fully assembled and functional safety devices.
- Activities may only be carried out by persons who are qualified or authorized for this purpose.

Any other use or application beyond this does not come under the scope of intended use.



3.1.2 Foreseeable misuse

Use contrary to intended use includes the following foreseeable misuse:

- Operation under conditions that deviate from the technical data.
- Operation without fully assembled and functional connections.
- Operation without fully assembled and functional safety devices.
- Modifications to the product without prior approval by TOX® PRESSOTECHNIK and the approving authority.
- Incorrect parameterization.
- Execution of activities by persons who are not qualified or authorized to do so.

The operating company is exclusively responsible for all personal injury and property damage resulting from non-intended use. Non-intended use will not be covered by the warranty or the operating approval.

3.1.3 Substances harmful to the wetting properties of lacquers (LABS)

No substances containing silicone, are knowingly processed and used.

3.2 Product identification

3.2.1 Type plate

The details on the type plate ensure clear identification of components and the specific operating parameters.

The type plate is attached permanently on the component.



3.3 Product overview and function description

Due to a toggle joint mechanism, a high working force on the ram is achieved with little effort at the lever.

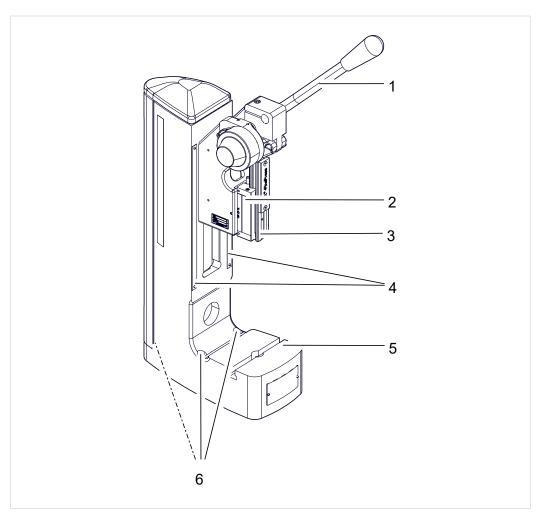


Fig. 1 Product overview

	Designation	Function
1	Hand lever	Drives the ram onto the workpiece.
2	Ram guide	Guides and lubricates the ram.
3	Ram	Transfers the force to the workpiece.
4	Height adjustment scale	Facilitates the adjustment of the open height.
5	Press bed	With T-groove for taking up tools.
6	Fastening holes	For screw fitting to the floor.



4 Technical data

4.1 Data sheet and type plate

For technical data see data sheet and the type plate attached to the product. www.tox.com

4.2 Press force diagrams

See Press force diagrams, Page 68.



5 Transport and storage

5.1 Safety during transport

MARNING

Hazard from suspended loads!

Severe crushing, impacts and serious accidents as a result of improper transportation and falling load!

- → Only use lifting gear that is appropriate and in perfect technical condition, as well as load attachment devices with an adequate safe working load.
- → Never stand or work under suspended loads.
- → Make sure that that no person is in the danger area.
- → When transporting and setting down, make sure that no parts of the body become jammed.
- → Wear suitable personal protective equipment (e.g. safety boots).

A CAUTION

Injury from toppling and falling products!

- Secure product from toppling, falling and accidentally moving.
- The transportation may only be carried out by authorized personnel.
- The product may only be transported with empty liquid containers.
- The product may only be transported with the transport pallet or transport device provided.
- The product may only be lifted with suitable lifting devices at suitable lifting points.
 - See Safety symbols, Page 18.
- Note the weight of the product.
 - See technical data sheet.
- Note the center of gravity of the product.
 See general arrangement drawing.



5.2 Storage when not in use

A CAUTION

Injury from toppling and falling products!

→ Secure product from toppling, falling and accidentally moving.

The following applies:

- Do not store the product outdoors.
- Protect the product against the influence of the weather.
- Avoid temperature fluctuations, so as to prevent corrosion from condensation.
- Seal connection openings.



5.3 Transport by lifting device

A threaded bore hole is provided for a ring bolt for lifting the TOX® FinePress.

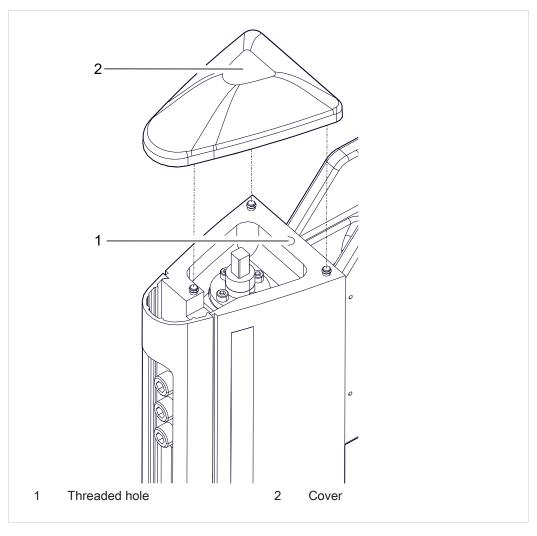


Fig. 2 Transport by lifting device

- 1. Remove the cover from the press frame.
- 2. Remove the crank, ring bolt and other loose parts from the TOX® FinePress.
- 3. Screw the ring bolt into the threaded bore.



5.4 Dispatch for repair

To dispatch the product for repair to TOX® PRESSOTECHNIK, please proceed as follows:

- Fill in the "Accompanying repair form". This we supply in the service sector on our website or upon request via e-mail.
- · Send us the completed form via e-mail.
- Then you will receive the shipping documents from us via e-mail.
- Send us the product with the shipping documents and a copy of the "Accompanying repair form".

For contact data see Contact and source of supply, Page 10 or www.tox.com.



6 Installation

6.1 Safety during installation

The installation may only be carried out by trained and authorized personnel.

A DANGER

Electrical hazards in case of contact with live parts!

Electric shock, burns or death in case of contact with live parts!

- → Have all work on the electrical equipment performed by an electrician.
- Disconnect power supply.
- → Wait for residual energy to disspate safely (at least 3 minutes).

MARNING

Ejecting parts and compressed air from compressed air conducting lines! Serious injuries to eyes and body cavities!

- → Always connect and disconnect lines without pressure.
- → Pay attention to maximum permitted pressures.
- → Wear individual protective equipment.

MARNING

Hazard from suspended loads!

Severe crushing, impacts and serious accidents as a result of improper transportation and falling load!

- Only use lifting gear that is appropriate and in perfect technical condition, as well as load attachment devices with an adequate safe working load.
- → Never stand or work under suspended loads.
- → Make sure that that no person is in the danger area.
- → When transporting and setting down, make sure that no parts of the body become jammed.
- → Wear suitable personal protective equipment (e.g. safety boots).



⚠ CAUTION

Tripping points from laid supply lines!

Injuries from tripping and falling!

- → Avoid tripping points when setting up.
- → Mark unavoidable tripping points with warning sign.



6.2 Requirements for installation

6.2.1 Set-up location

The set-up location:

- Must be free from dust and dirt
- Must be a closed room
- Must have a firm, level floor
- Must have sufficient space and easy access to the system parts
- Prevent the spray of sparks
- The floor must have sufficient load bearing capacity for the weight of the system parts and stresses caused by movements
- The stability must be ensured
- Information on technical data, operating conditions, etc. for the intended use can be found in type sheet or the product-specific data sheet and circuit diagram.
- The plant must be screwed to the substrate.




6.3 Installing accessories

6.3.1 Installing process monitoring (option)

→ Please see the separate operating manual for the installation of the process monitoring system.




6.3.2 Installing the ergonomic handle (optional)

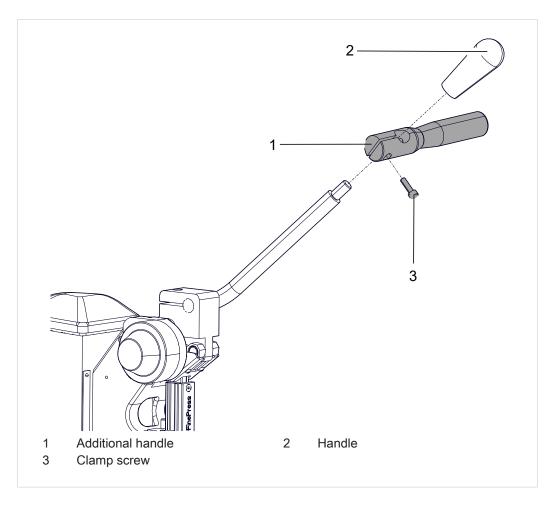

- 1. Unscrew the handle of the hand lever.
- 2. Slide the ergonomic handle onto the hand lever.
- 3. Screw the additional handle in the desired position with the clamping screw.
- 4. Reattach the handle of the hand lever.




6.3.3 Installing the stroke counter (optional)

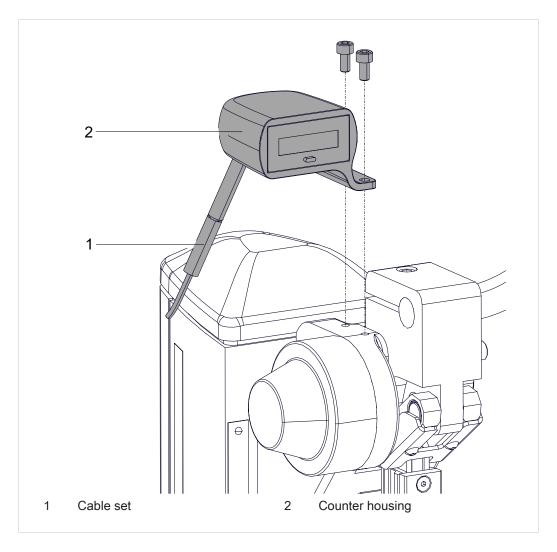

- 1. Disconnect the cable set from the counter housing.
- 2. Install the counter housing on the press head using cylinder screw M 5x12.
- 3. Loosen the toggle lever from the lever head and tilt it to the front. See Adjusting the working stroke, Page 46.




Installing the button

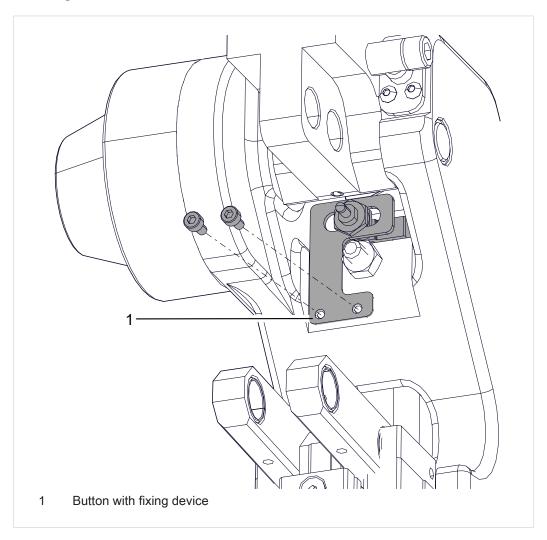

- 1. Guide the cable plug of the push button to the back.
- 2. Screw the push button with fixing device onto the press head (cheese head screws M 3x8).
- 3. Check the switching point of the push button. The push button must switch shortly before reaching the final position. The switching point is set using the two nuts on the push button.
- 4. Connect the cable set to the counter housing.
- 5. Connect the toggle lever and lever head using stud. See Adjusting the working stroke, Page 46.
- 6. When assembling, the stud must be fastened in the same bore hole of the lever head. Otherwise the press force and working stroke are changed.
- 7. Secure the stud using set screws.




6.3.4 Installing the force sensor (optional)

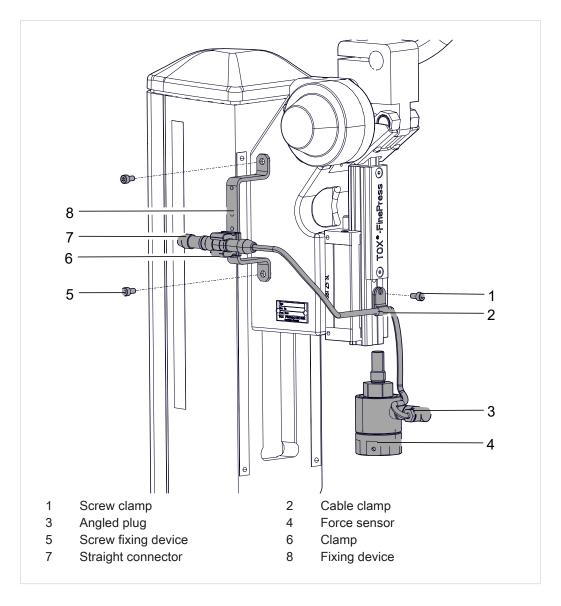

- 1. Screw the fixing device onto the press head.
- 2. Screw the force sensor onto the ram.
- 3. Fasten the cable clamp with the screw.
- 4. Connect the angled plug to the force sensor.
- 5. Screw the clamp in the lowest position onto the fixing device.
- 6. Connect the straight connector to the evaluation unit and insert it into the clamp.



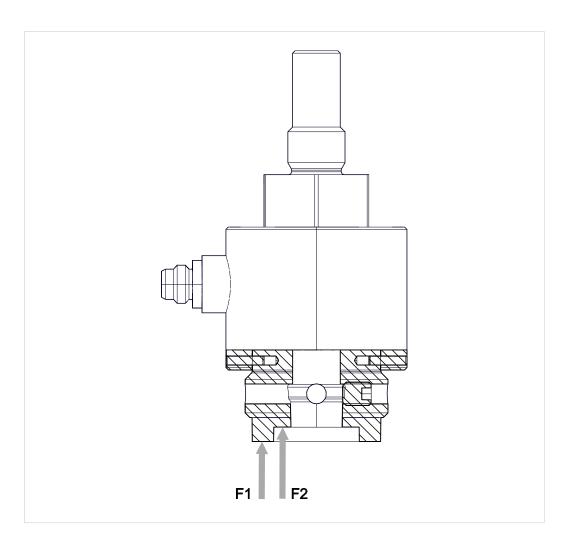


→ **NOTE!** Observe the maximum thread length! The tool must bear against flange 1 or flange 2.




6.3.5 Install the return stroke lock (option)

During retrofitting it may be necessary to replace the shaft. In this case, please contact TOX® PRESSOTECHNIK.

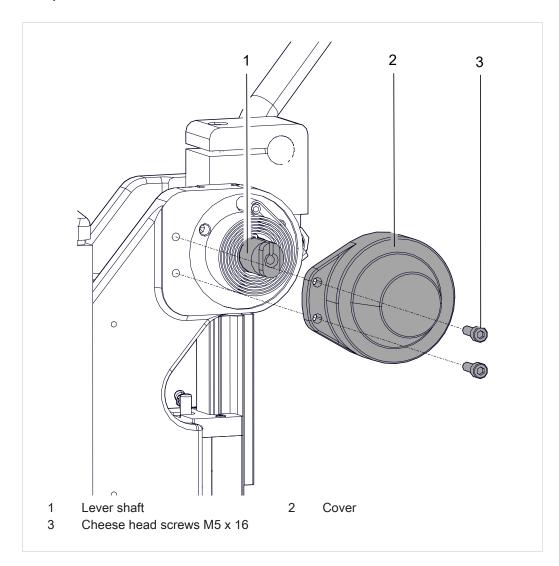

1. Unscrew the lever shaft from the cover. The flat spiral spring must nor be removed.




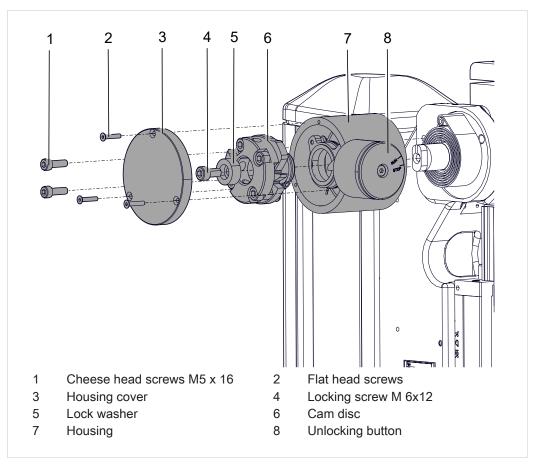

- 2. Attach the housing of the return stroke lock on the lever shaft and screw it on with the M 5x16 cylinder screws.
- 3. The unlocking button must point to the front and be positioned on <STOP>.
- 4. Insert the cam disc into the housing. The cam disk must latch in on the lever shaft.
- 5. Fix the lock washer with the M 6x12 locking screw.
- 6. The return stroke lock must be adjusted. See Adjusting the return stroke lock, Page 50.
- 7. Install the housing cover with the flat head screws.




6.3.6 Installing the slide table (optional)

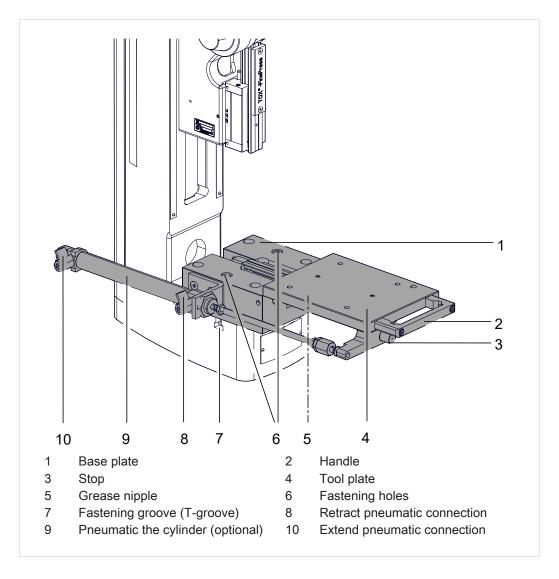

- 1. Insert the T-groove nuts into the fastening groove of the press frame.
- 2. Pull out the tool plate until the fastening holes are accessible.
- 3. Screw the base plate over the mounting holes using the T-groove nuts.
- 4. The insertion width is set via the stop.




6.3.7 Installing travel sensor (option)

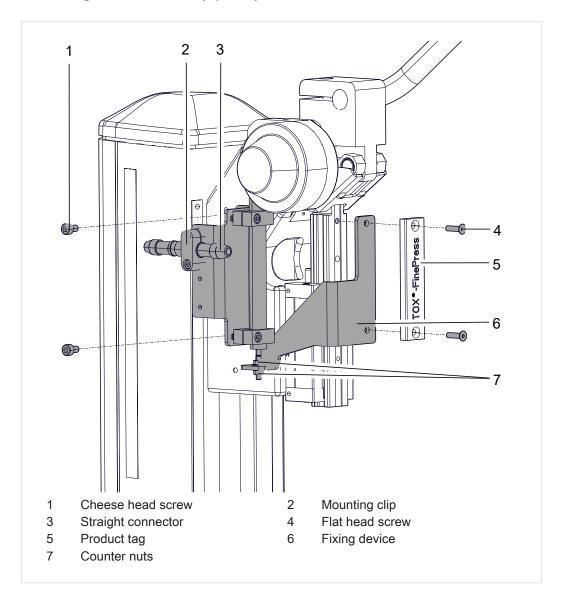

- 1. Unscrew the product tag.
- 2. Screw on the fixing device together with the tag. The travel sensor is pointing towards the press frame.
- 3. Screw the rear fixing device onto the press head.
- 4. Connect the cable to the evaluation unit.
- 5. Screw the straight connector to the fixing device using the fastening clip.
- 6. Set the zero point, see: Setting the travel sensor, Page 53.



6.3.8 Installing the tool holding fixture (optional)

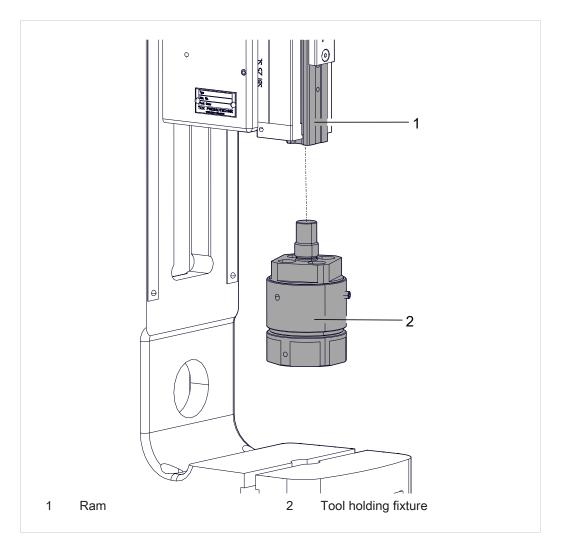

→ The tool holding fixture is screwed into the ram.

For technical data and installation dimensions see data sheet. www.tox.com





7 Commissioning

7.1 Safety during the commissioning

The commissioning may only be carried out by trained and authorized personnel.

7.1.1 Safety device

All safety equipment must be properly assembled and functional.



7.2 Requirements for the commissioning

The requirements are:

- All components are properly installed.
- The safety devices of the entire system are properly assembled and functional.
- Any transport locks are removed.
- Supply connections, communication and control connections, material or media hoses are installed properly. The permissible values are complied with.
- No tools, installation equipment or other interfering objects may be left in the tool area or working area.



8 Operation

8.1 Safety in operation

A CAUTION

Dangerous lever movements!

Contusions and impacts!

- → Always hold the hand lever.
- → Release it only when it is in the top initial position.

8.2 Requirements for operation

- The safety devices of the entire system are properly assembled and functional.
- All piece parts are intact and properly maintained.
- Supply connections, communication and control connections, material or media hoses are installed properly. The permissible values are complied with.

8.3 Process monitoring

See the separate operating manual for the installation of the process monitoring system.



8.4 Setting the open height of the press head

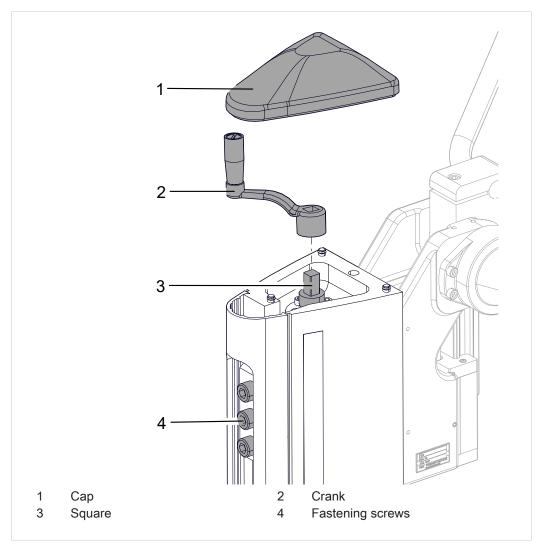


Fig. 3 Setting the open height of the press head

NOTE! Damage on the tool or the workpiece! Calculate the open height before starting operation!



- ✓ Set the fine adjustment on the largest opening. See Fine adjustment of working stroke, Page 49.
- 1. Remove the cover from the press frame.
- 2. Loosen the fastening screws of the clamping plate. Do not unscrew the screws!
- 3. Place the supplied crank onto the square and adjust the open height by turning it.
 - Turning clockwise increases the open height.
 - Turning anti-clockwise reduces the open height.
- 4. Remove the crank and stow it away.
- 5. Tighten the fastening screws of the clamping plate. Observe the tightening torques, see Inspecting the fastening of the press head, Page 60.
- 6. **NOTE!** Damage on the tool! The tool must be aligned!
- 7. Place the cover on the press frame.




8.5 Adjusting the working stroke

The working stroke of the press can be changed by shifting the toggle lever. The force/stroke ranges can be found in the data sheet.

If a travel sensor is installed, it must then be readjusted. See Adjusting travel sensor, Page 53.




8.5.1 Shifting the toggle lever on presses with a bracket.

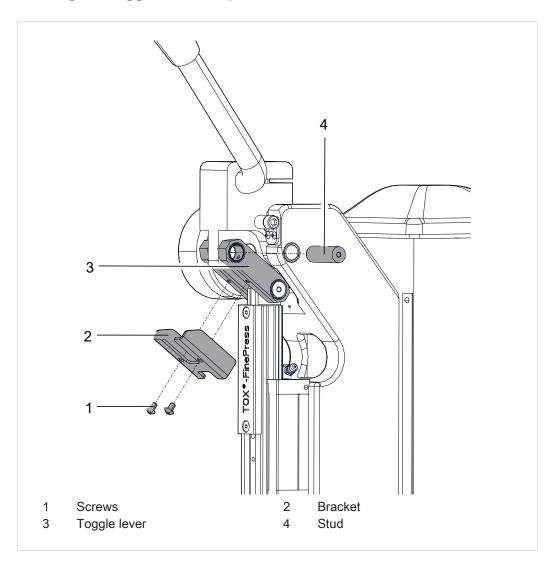

- 1. Unscrew the screws and remove the bracket.
- 2. Remove the studs.
- 3. Move the toggle lever into the desired position.
- 4. Install the studs.
- 5. Install the bracket to secure the studs.
 - > The toggle lever is connected.




8.5.2 Shifting the toggle lever on presses with set screws.

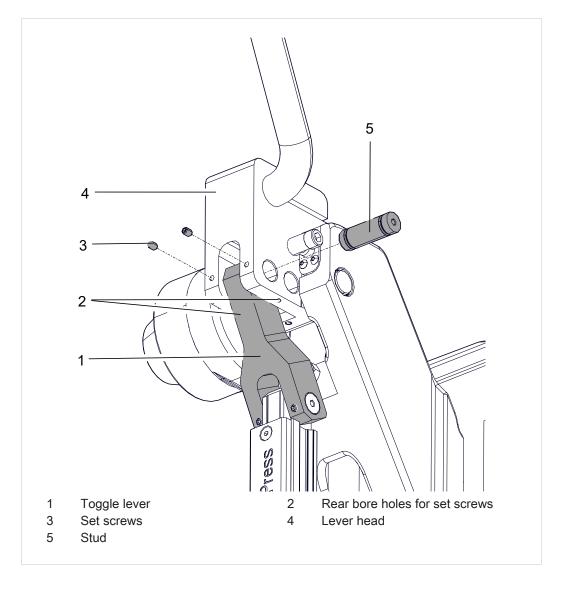

- 1. Unscrew and remove the set screws.
- 2. Pull out of the stud.
- 3. Move the toggle lever into the desired position.
- 4. Install the studs.
- 5. Screw the set screws into the corresponding bore hole to secure the stud.



8.6 Fine adjustment of working stroke (option)

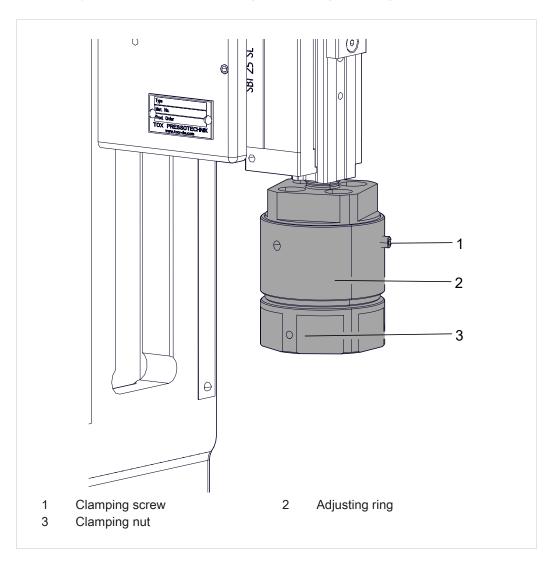

- 1. Loosen the clamping screw.
- 2. Turn the adjusting ring to adjust the open height.

A line on the scale of the adjusting ring corresponds to a height adjustment of 0.02 mm.

Turning clockwise - increases the open height.

Turning anticlockwise - reduces the open height.

3. Fix the adjusting ring with the clamping screw.

8.7 Resetting the stroke counter (optional)


The stroke counter has a reset button.

→ Press the stroke counter button.



8.8 Adjusting the return stroke lock (optional)

NOTE! Do not push the hand lever back while the mechanism is locked.

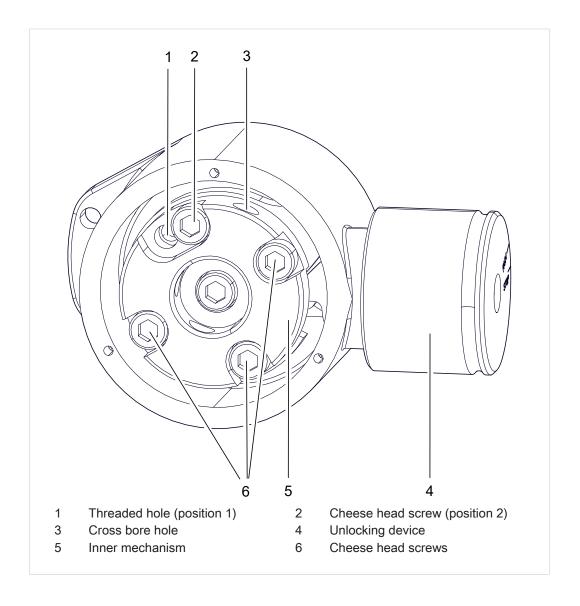




- √ The housing cover is removed.
- 1. Loosen the cheese head screws (positions 2 and 6).
- 2. Pull the unlocking device and turn to position <STOP> to release the hand lever.
- 3. Press the hand lever completely down and hold.
- Turn the inner mechanism clockwise until the return stroke lock unlocks.
 The lock engages twice audibly with a click, and unlocks by turning it further.

A suitable tool (e.g. Allen key) can be inserted into the cross bore hole to turn the mechanism.

- 5. Tighten the cheese head screws (positions 2 and 6).
- 6. Install the housing cover.


Lever travel for position 1

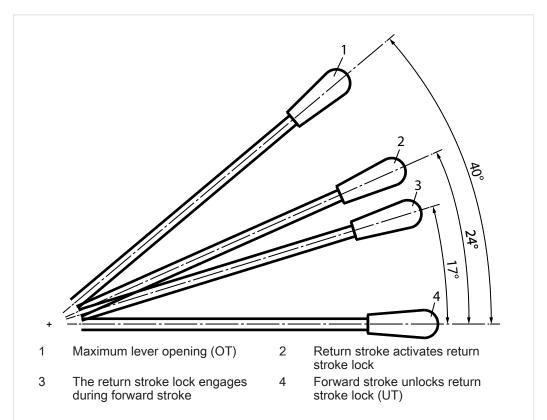

- √ The return stroke lock has engaged.
- √ The housing cover is removed.
- 1. Lock the return stroke lock in the second position.
- Unscrew the cheese head screw (position 2) and screw it into position 1 (position 1).
- 3. Install the housing cover.




Lever travel for position 2

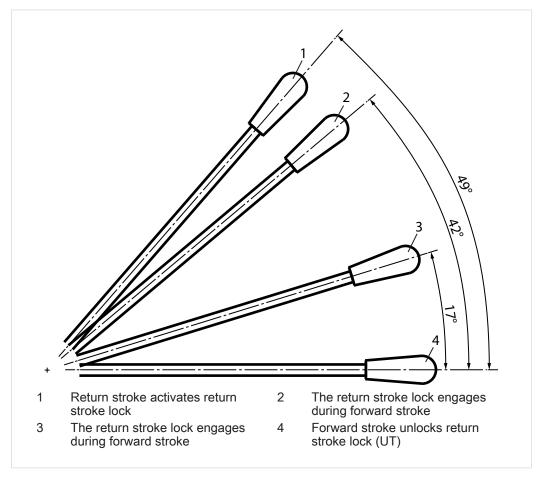

- ✓ The return stroke lock has engaged.
- √ The housing cover is removed.
- 1. Unscrew the cheese head screw (position 1) and screw it into position 2 (position 2).
- 2. Install the housing cover.



8.9 Setting the travel sensor (option)

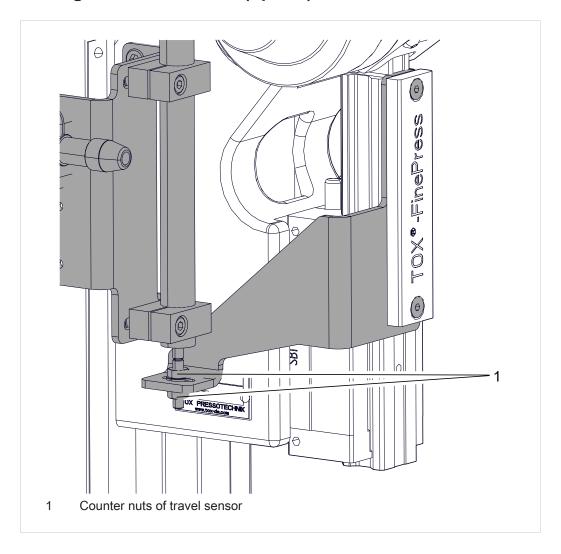

- 1. Loosen the counter nuts of travel sensor.
- 2. Press the hand lever of the press firmly up and hold.
- 3. Set the zero point on the travel sensor by turning the nut.
- 4. Tighten the counter nuts of the travel sensor.



9 Troubleshooting

9.1 Safety during troubleshooting

Troubleshooting may only be carried out by trained and authorized personnel. The following applies:

- Inform operating personnel before starting repair work.
- Appoint a supervisor.



9.2 Detecting faults

If the press is equipped with a control system, the faults or warnings on the central control unit are displayed and described.

Fault	Cause	Measures
The ram does not extend.	There is a mechanical fault on the guide.	Contact authorized service personnel.
The nominal force not reached.	There is a mechanical fault on the guide.	Contact authorized service personnel.
	The press head is not adequately fastened.	Tighten the fastening screws evenly. Observe the tightening torques, see: Inspecting the fastening of the press head, Page 60).



Maintenance table

The specified intervals are only approximate values. Depending on the area of application, the actual values may differ from the guide values.

Maintenance cycle	Additiona	Additional information	
Weekly	10.4.1	TOX® FinePress inspecting	
Monthly	10.4.3	Inspecting and cleaning movable parts and guides	
Half-yearly	10.4.2	Inspecting the fastening of the press head	



10 Maintenance

10.1 General information

Maintenance may only be carried out by trained and authorized personnel. The following applies:

- Observe maintenance intervals if present and stipulated.
- Maintenance intervals may vary from the stipulated maintenance intervals.
 The maintenance intervals may have to be verified with the manufacturer if necessary.
- Perform only maintenance work that is described in this manual.
- Inform operating personnel before starting repair work.
- Appoint a supervisor.



10.2 Safety during maintenance

The following applies:

- Observe maintenance intervals if present and stipulated.
- Maintenance intervals may vary from the stipulated maintenance intervals.
 The maintenance intervals may have to be verified with the manufacturer if necessary.
- Perform only maintenance work that is described in this manual.
- Inform operating personnel before starting repair work.
- · Appoint a supervisor.

10.3 Requirements for maintenance

10.3.1 Set system to maintenance position

Unless specified otherwise, before all maintenance work:

- 1. Retract the working piston.
- 2. Install a restraint device if necessary.




10.4 TOX® FinePress maintaining

10.4.1 TOX® FinePress inspecting

- System is in maintenance position.
 See Set system to maintenance position, Page 58.
- 1. Check the plant, particularly moving parts for wear, obvious defects and damage.
- 2. Check the supply connections for tightness.



10.4.2 Inspecting the fastening of the press head

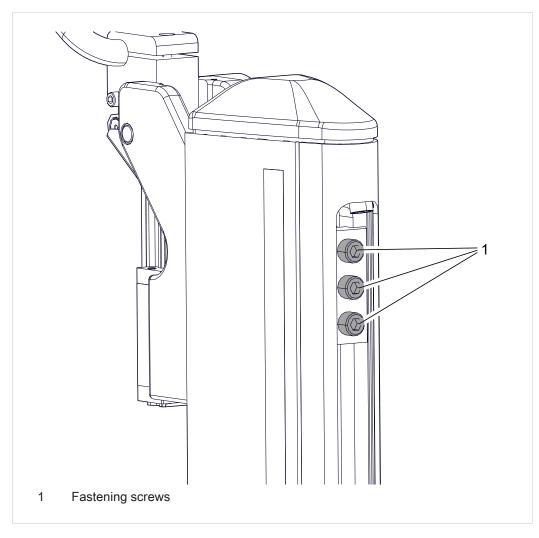

- System is in maintenance position.
 See Set system to maintenance position, Page 58.
- 1. Check the tightening torque of the fastening screws.
- 2. **NOTE!** Damage on the tool! Check the alignment of the tool!

Screw size	Tightening torque
M 8	30 Nm
M 10	80 Nm
M 12	135 Nm
M 16	340 Nm

Tab. 2 Fastening screws of the press head on the frame



10.4.3 Inspecting and cleaning movable parts and guides

System is in maintenance position.
 See Set system to maintenance position, Page 58.

NOTE

Incorrect cleaning agents or cleaning procedures, lack of corrosion protection!

Damage to machine components!

- → Clean plastic parts such as panes (safety guard door, housing, etc.) and control elements with cotton cloths (smooth woven structure) and suitable cleaning agents (e.g. clear water and neutral rinsing liquid).
 Do not use scouring (abrasive) cleaning agents.
- Only touch bare spots with gloves.
- → For metallic surfaces use cleaning set, such as industrial cleaner (e.g. Loctite 7063, or Würth Montagekraftreiniger 0890 107), vacuum cleaner, dry cloth and brush.
- → After cleaning, protect bare outer surfaces from corrosion. Coat surfaces with a cloth slightly moistened with anticorrosive fluid.
- → Keep inside surfaces, especially element-carrying parts, dry and free of grease.
- → Inspect movable parts and guides, clean and lubricate if necessary.



11 Repairs

11.1 Safety during repairs

Repairs may only be carried out by trained and authorized personnel.



12 Disassembly and Disposal

12.1 Safety during disassembly and disposal

The dismantling and disposal may only be carried out by trained and authorized personnel.

A DANGER

Electrical hazards in case of contact with live parts!

Electric shock, burns or death in case of contact with live parts!

- → Have all work on the electrical equipment performed by an electrician.
- Disconnect power supply.
- → Wait for residual energy to disspate safely (at least 3 minutes).

MARNING

Ejecting parts and compressed air from compressed air conducting lines! Serious injuries to eyes and body cavities!

- → Always connect and disconnect lines without pressure.
- Pay attention to maximum permitted pressures.
- → Wear individual protective equipment.

A CAUTION

Sharp edges caused by material splintering!

Injuries from worn parts!

- → Wear individual protective equipment.
- Do not move fingers along the cutting edges.
- → Be particularly careful and attentive.



12.2 Decommissioning

Decommissioning means that the plant is not in operation for a longer period of time but remains at the installation site for recommissioning later.

- 1. Move plant into home position.
- 2. Install a restraint device if necessary.
- 3. Switch off plant at the main switch.
- 4. Clean the system and protect it against corrosion.
- 5. Protect plant against loss of data and deep discharge.

12.3 Shutdown

Shutdown means that the system is shut down permanently and/or is prepared for removal.

- 1. Stop system and wait for it to come to a standstill.
- 2. Remove material if necessary.
- 3. Switch off the system at the main switch and secure it against being switched on again.
- 4. First disassemble or dismantle after switching off the power (electricity, pneumatics) and after residual energy has safely dissipated (at least 3 minutes).
- 5. Remove electrical supply line (first at the terminal, then on the machine).
- 6. Remove compressed air supply line.
- 7. Remove network connection.
- 8. Clean the system and protect it against corrosion.
- 9. Protect open cable ends against penetration of dirt.
- 10. Do not remove cable identifications.



12.4 Disassembling

The system consists of recyclable materials.

NOTE

Environmental damage!

Improper recycling endangers the environment!

- → Dispose of materials separately and properly.
- → Regional disposal regulations must be observed.
- 1. Strip the system down into its constituent parts.
- 2. Dispose of greases and oils separately.
- 3. Sort the constituent parts by material and dispose of according to the local regulations.

12.5 Disposal



When disposing of packaging, consumables and spare parts, including the machine and its accessories, the relevant national environmental protection regulations must be complied with.

For the environmentally compatible utilization and disposal of its electronic components, please contact the certified disposal company for electronic waste or return it to TOX® PRESSOTECHNIK.

For further information about the take-back and forms see www.tox.com in the service sector.

Regarding questions about disposal please contact TOX® PRESSOTECHNIK SE & Co. KG (see Contact and source of supply, Page 10).



- 13 Appendices
- 13.1 Declaration of conformity



EU DECLARATION OF CONFORMITY

Original EU declaration of conformity

The manufacturer TOX® PRESSOTECHNIK SE & Co. KG declares herewith that the following product

Designation/function Toggle press TOX® FinePress Product name/module Model/type KFS, KFL, KFW, KFSU, KFLU, KFWU Serial number see type plate complies with all relevant provisions of the following legislation, including any changes in force at the moment of the declaration. This declaration of conformity is issued under the sole responsibility of the manufacturer. Applied EU legislation: 2006/42/EC Machinery Directive, OJ L 157 dated 09/06/2006, P. 24-86 Source references of the applied harmonized standards: Safety of machinery - General principles for design - Risk DIN EN ISO 12100:2011-03 assessment and risk reduction (ISO 12100:2010); German Version EN ISO 12100:2010 Authorized to compile the technical file: Sascha Richter, Riedstraße 4, 88250 Weingarten Place and date Weingarten, 13.01.2025 Information on the signatory Stefan Katzenmaier Component and Region Sales Manager

Filing OC



13.2 Press force diagrams


TOX®-FinePress


TOX° PRESSOTECHNIK

Pressforce [N]

Presskraftdiagramme / press force diagram Kniehebel-Pressen KFS 002.002 Toggle Presses KFS 002.002

Version: 2020-03-27



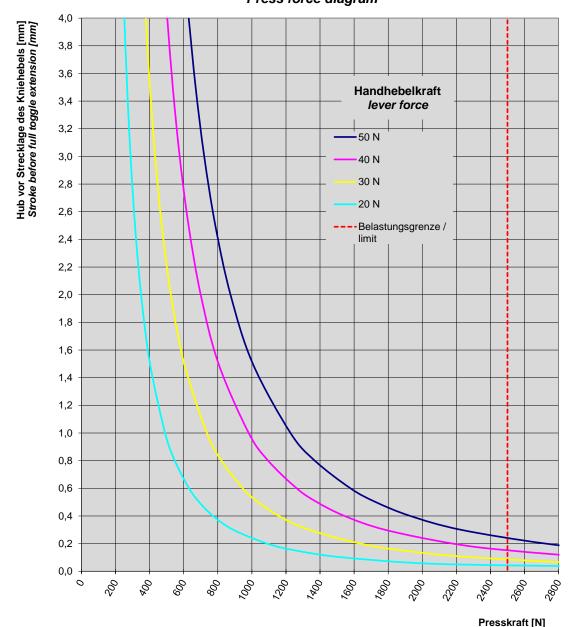

Die Aufbiegung der Presse ist nicht Berücksichtigt / the deflection of the press is not considert


Die Info zur Aufbiegung finden sie in den technischen Daten von der Betriebsanleitung / you will find the notice to the deflection in the technical data of the operating instructions




TOX° PRESSOTECHNIK

Presskraftdiagramme / press force diagram Kniehebel-Pressen KFSU/LU/WU 008.002 Toggle Presses KFSU/LU/WU 008.002

Version: 2020-03-27

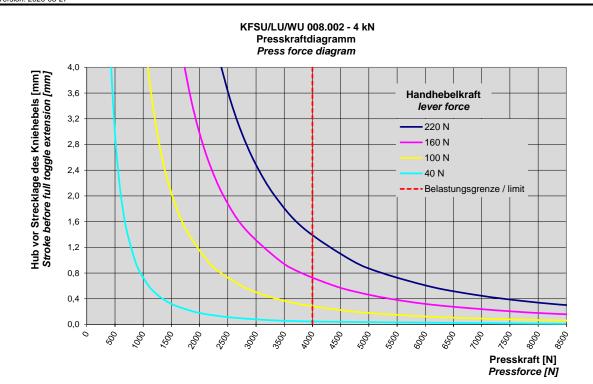

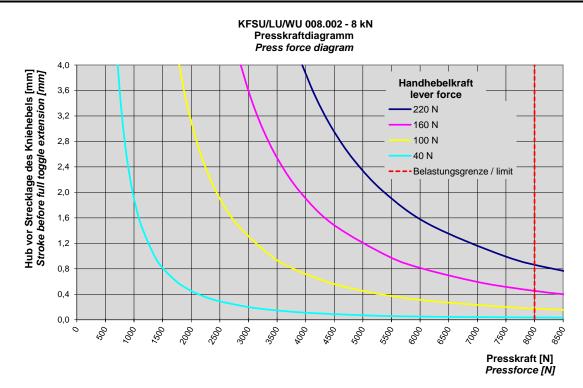

* Die Aufbiegung der Presse ist nicht Berücksichtigt / the deflection of the press is not considert * Die Info zur Aufbiegung finden sie in den technischen Daten von der Betriebsanleitung


/ you will find the notice to the deflection in the technical data of the operating instructions




TOX[®] **PRESSOTECHNIK**

Presskraftdiagramme / press force diagram Kniehebel-Pressen KFSU/LU/WU 016.002 Toggle Presses KFSU/LU/WU 016.002

Version: 2020-03-27

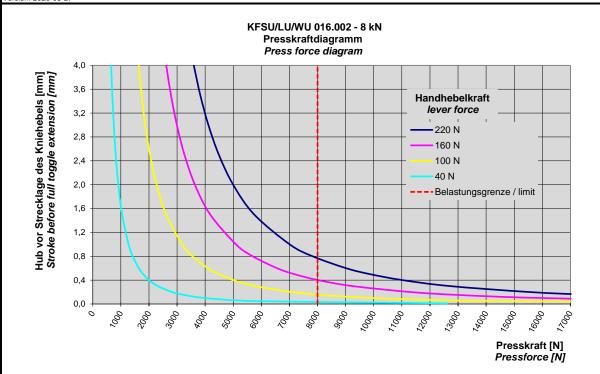

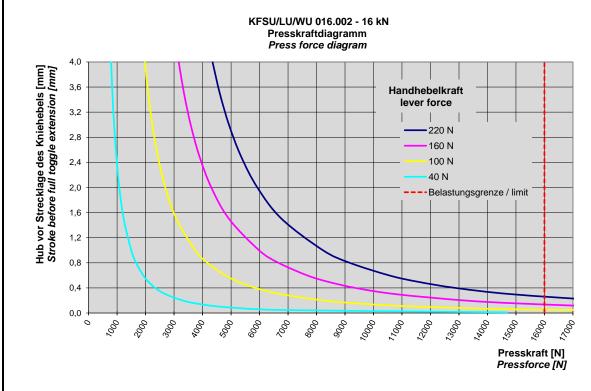


/ you will find the notice to the deflection in the technical data of the operating instructions




TOX° PRESSOTECHNIK

Presskraftdiagramme / press force diagram Kniehebel-Pressen KFSU/LU/WU 025.004 Toggle Presses KFSU/LU/WU 025.004

Version: 2012-11-15

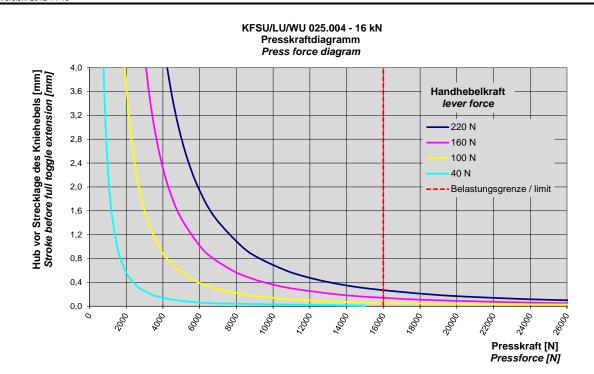

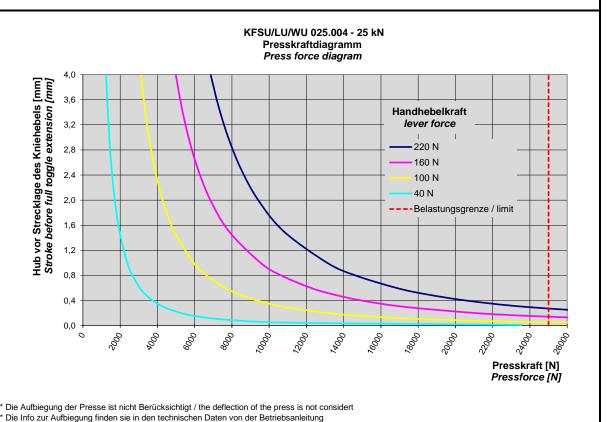

/ you will find the notice to the deflection in the technical data of the operating instructions


TOX®-FinePress



Presskraftdiagramme / press force diagram Kniehebel-Pressen KFS/L/W 025.005 Toggle Presses KFS/L/W 025.005

Version: 2020-03-27

KFS/L/W 025.005 - 25 kN Presskraftdiagramm Press force diagram

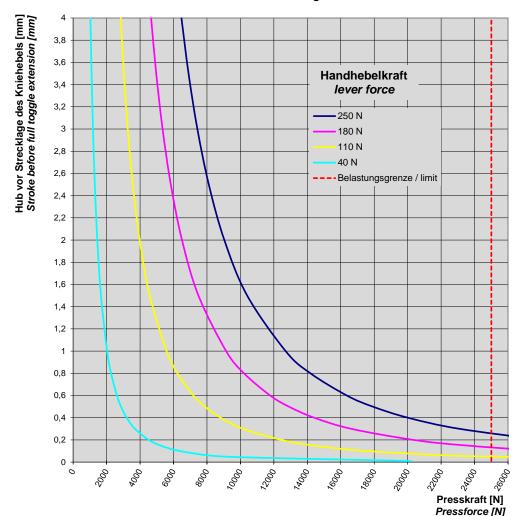

Die Aufbiegung der Presse ist nicht Berücksichtigt / the deflection of the press is not considert Die Info zur Aufbiegung finden sie in den technischen Daten von der Betriebsanleitung
/ you will find the notice to the deflection in the technical data of the operating instructions


TOX Pressotechnik Riedstraße 4 D - 88250 Weingarten Tel 0751/5007-0 Fax 0751/52391 E-Mail info@tox-de.com


TOX®-FinePress

TOX[®] **¬** PRESSOTECHNIK

Presskraftdiagramme / press force diagram Kniehebel-Pressen KFS/L/W 033.002 Toggle Presses KFS/L/W 033.002

Version: 2012-11-15



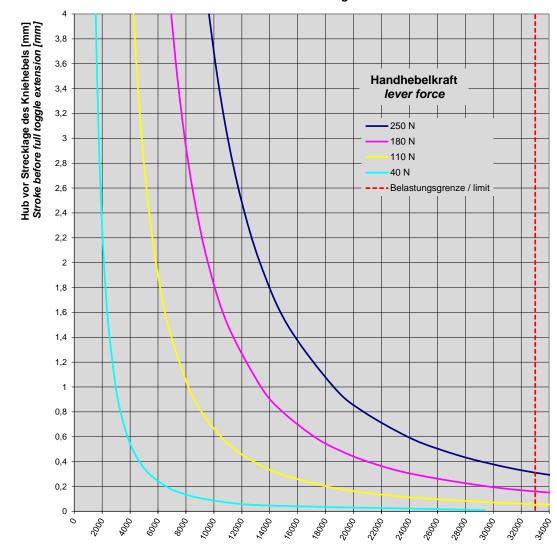

Presskraft [N] Pressforce [N]

Die Aufbiegung der Presse ist nicht Berücksichtigt / the deflection of the press is not considert

Die Info zur Aufbiegung finden sie in den technischen Daten von der Betriebsanleitung
/ you will find the notice to the deflection in the technical data of the operating instructions

TOX Pressotechnik Riedstraße 4 D - 88250 Weingarten Tel 0751/5007-0 Fax 0751/52391 E-Mail info@tox-de.com



Index

A		E	
Accessories		Electromagnetic	
Installing	30	Hazard	16
Adjusting		Ergonomic handle	
Working stroke	46	Installing	31
Adjustment		Exclusion of liability	. 6
Return stroke lock	50		
Attachment point	25	F	
В		Faults	EE
Decis actatus requirements	1.1	Detect	၁၁
Basic safety requirements	11	Fine adjustment	40
		Working stroke	49
C		FinePress	
Commissioning	41	Inspecting	
Requirements	42	Maintaining	59
Safety		Force sensor	
Safety device	11	Installing	
Conformity		Function description	21
Contact			
Contusion	. •	G	
Hazard	15	Gender note	7
102010		General information	. ,
D		Maintenance	57
D		Guidelines	
Declaration of conformity	ah	Guides	. 0
Decommissioning	64	Inspecting	61
Disassembly 63, 6	35	inspecing	01
Safety6	63		
Dispatch		Н	
Repair	26	Hazard	
Disposal 63, 6	35	Contusion	15
Safety6	63	Electrical	14
Document		electromagnetic	16
additional	7	Hazardous substances	
Validity		hydraulic	15
Drive/Fastening		Laser	
Inspecting	30	Noise	
		Pneumatic	
		Thermal	
		Hazard potential	
		Hazardous substances	
		Hydraulic	10
		Hazard	15
		1 1a2a1U	13



l	N	
Images	Noise	
Highlighting9	Hazard	17
Important information 6	Note	
Information	Gender	7
Important 6	General	
Inspection	Legal	6
Drive/Fastening	Warning signs	
FinePress	3 3 3	
Guides 61	0	
Installation	_	
Accessories	Open height of the press head	
Ergonomic handle	Setting	
Force sensor	Operation	
Process monitoring	Process monitoring	43
_	Requirements	43
Requirement	Safe	19
	Safety	43
Safety	Organizational measures	12
Set-up location	-	
Slide table	Р	
Stroke counter	-	
Tool holding fixture 40	Press force diagrams	22
Intended use	Process monitoring	
	Installing	30
L	Process monitoring system	
LABS	Operate	
Laser	Product overview	21
Hazard 16		
Legal note	Q	
Legal Hote 0	Qualifications	12
	Qualifications	13
M	_	
Maintenance 57	R	
FinePress 59	Repair	
General information 57	Dispatch	26
Requirement 58	Repairs	
Safety 58	Safety	
Maintenance position 58	Requirement	
Measures	Installation	29
Organizational	Maintenance	
Misuse	Reset	
Mounting	Stroke counter	49
Travel sensor	Return stroke lock	
114761 0011001	Adjusting	50
	Install	
	IIIStaii	30



S	
Safety	11
Commissioning	
Disassembly	
Disposal	
Installation	27
Maintenance	58
Operation	43
Repairs	62
Transport	23
Troubleshooting	54
Safety device	
Commissioning	41
safety requirements	
Basic	
Operating company	
Safety symbols	18
Selection	
Personnel	
Selection of personnel	13
Setting	
Open height of the press head	
Travel sensor	
Set-up location	29
Shift toggle lever	47
Bracket	
Set screws	
Shutdown	64
Slide table	20
Installing	
Storage	
Stroke counter	24
Installing	32
Resetting	
Substances harmful to the wetting properties	
lacquers (LABS)	20
. ,	

Т
Target group 7
Technical data
Texts
Highlighting9
Tool holding fixture
Installing 40
Transport
Attachment point
Safety
Travel sensor
Installing 39
Setting 53
Troubleshooting 54
Safety 54
U
Use
Intended
interided
V
Validity
Document
W
Warning signs 8
Working stroke
Adjusting 46
Fine adjustment

